GLACIER





inferno

GLACIER

COLD AS ICE



REFRIGERATION LINE 01

Reach-In Refrigerators & Freezers	03
Undercounters	07
Salad Prep Tables	13
Mega Tops	17
Salad Prep Tables With Drawers	21
Mega Tops With Drawer	23
Pizza Prep Tables	25
Chef Bases	27
Back Bar Coolers	31
Kegerators	35
Glass Door Merchandisers	39
Refrigerated Display Cases	45

COLD AS ICE

CONTENT

Reach-In
Refrigerators & Freezers

Glacier reach-in refrigerators and freezers are built to meet the needs of any foodservice application, delivering top performance without sacrificing style. Our single door refrigerators and freezers come factory equipped with field reversible hinges. The sleek design features recessed door handles, ensuring a comfortable grip and making it easy to wipe away food, grease and bacteria. A bottom-mounted compressor ensures efficient cooling, while digital controls let you adjust the temperature precisely. Self-closing doors and auto-defrosting help save energy and maintain temperature, while adjustable shelves and swivel casters make maintenance a breeze.



Bottom-Mounted Reach-In Refrigerators Solid Door

Features

- Coved corners for easy cleaning
- Recessed door handle and door locks
- Self-closing doors with 90° stay open feature
- Digital temperature controls with LED display
- 5" casters with locks on front
- Field reversible door on single door units
- 4, 8 or 12 adjustable and removable wire shelves
- Fits 18" x 26" sheet pans
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Stainless steel exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost




Model		GR-1
External Dimensions (inches)	W	27 1/2
	D	32 5/8
	H	80 3/8
Crated Dimensions (inches)	W	29 1/8
	D	34 1/4
	H	84 5/8
Temperature Range °F		33 ~ 41°F
Compressor Power (HP)		1/5
Net Weight		286
Gross Weight		343
# of Shelves		4
NEMA Config.		5-15P
Amps		4.1





Model		GR-2
External Dimensions (inches)	W	55 1/8
	D	32 5/8
	H	80 3/8
Crated Dimensions (inches)	W	56 3/4
	D	34 1/4
	H	84 5/8
Temperature Range °F		33 ~ 41°F
Compressor Power (HP)		1/2
Net Weight		463
Gross Weight		528
# of Shelves		8
NEMA Config.		5-15P
Amps		7.4



Model		GR-3
External Dimensions (inches)	W	82 5/8
	D	32 5/8
	H	80 3/8
Crated Dimensions (inches)	W	84 1/4
	D	34 1/4
	H	84 5/8
Temperature Range °F		33 ~ 41°F
Compressor Power (HP)		1/2
Net Weight		595
Gross Weight		692
# of Shelves		12
NEMA Config.		5-15P
Amps		7.6





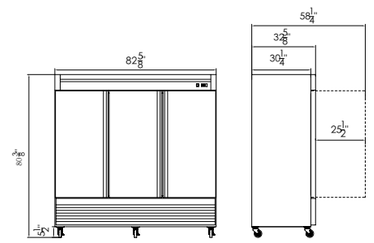

Bottom-Mounted Reach-In Freezers Solid Door

Features

- Coved corners for easy cleaning
- Recessed door handle and door locks
- Self-closing doors with 90° stay open feature
- Digital temperature controls with LED display
- 5" casters with locks on front
- Field reversible door on single door units
- 4, 8 or 12 adjustable and removable wire shelves
- Fits 18" x 26" sheet pans
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Stainless steel exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost










Model		GF-1
External Dimensions (inches)	W	27 1/2
	D	32 5/8
	H	80 3/8
Crated Dimensions (inches)	W	29 1/8
	D	34 1/4
	H	84 5/8
Temperature Range °F		0 ~ -8°F
Compressor Power (HP)		3/4
Net Weight		287
Gross Weight		343
# of Shelves		4
NEMA Config.		5-15P
Amps		6

Model		GF-2
External Dimensions (inches)	W	55 1/8
	D	32 5/8
	H	80 3/8
Crated Dimensions (inches)	W	56 3/4
	D	34 1/4
	H	84 5/8
Temperature Range °F		0 ~ -8°F
Compressor Power (HP)		1
Net Weight		463
Gross Weight		528
# of Shelves		8
NEMA Config.		5-15P
Amps		8.5

Model		GF-3
External Dimensions (inches)	W	82 5/8
	D	32 5/8
	H	80 3/8
Crated Dimensions (inches)	W	84 1/4
	D	34 1/4
	H	84 5/8
Temperature Range °F		0 ~ -8°F
Compressor Power (HP)		3/4+3/4
Net Weight		595
Gross Weight		692
# of Shelves		12
NEMA Config.		5-20P
Amps		11.3





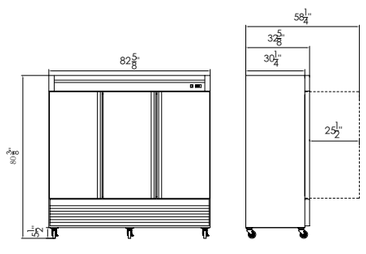

Bottom-Mounted Reach-In Freezers Glass Door

Features

- Coved corners for easy cleaning
- Recessed door handle and door locks
- Self-closing doors with 90° stay open feature
- Digital temperature controls with LED display
- 5" casters with locks on front
- Field reversible door on single door units
- 4 or 8 adjustable and removable wire shelves
- Fits 18" x 26" sheet pans
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications


- Stainless steel exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost






Model		GF-1G
External Dimensions (inches)	W	27 1/2
	D	34
	H	80 3/8
Crated Dimensions (inches)	W	29 1/8
	D	35
	H	84 5/8
Temperature Range °F		0 ~ -8°F
Compressor Power (HP)		3/4
Net Weight		308
Gross Weight		364
# of Shelves		4
NEMA Config.		5-15P
Amps		6

Model		GF-2G
External Dimensions (inches)	W	55 1/8
	D	34
	H	80 3/8
Crated Dimensions (inches)	W	56 3/4
	D	34 1/4
	H	84 5/8
Temperature Range °F		0 ~ -8°F
Compressor Power (HP)		1
Net Weight		506
Gross Weight		586
# of Shelves		8
NEMA Config.		5-15P
Amps		12.8





Undercounters

Glacier undercounter refrigerators and freezers incorporate excellence in both form and function. With a spacious interior and brushed stainless steel design, these units embody both durability and a modern style. Recessed door handles ensure comfort and easy cleaning. Additionally, enjoy the versatility of multiple, adjustable and removable wire shelves, providing unparalleled convenience tailored to your needs.



Undercounter Refrigerators Solid Door

Features


- Coved corners for easy cleaning
- Recessed door handle
- Self-closing doors with 90° stay open feature
- 5" casters with locks on front
- Shorter/smaller casters available for purchase
- Epoxy-coated removable shelves
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Stainless steel exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost




Model		GUR-29
External Dimensions (inches)	W	29 1/8
	D	31 1/2
	H	36
Crated Dimensions (inches)	W	30 1/2
	D	33 1/8
	H	39 3/8
Temperature Range °F		33 ~ 41°F
Compressor Power (HP)		1/5
Net Weight		158
Gross Weight		200
# of Shelves		1
NEMA Config.		5-15P
Amps		2





Model		GUR-48
External Dimensions (inches)	W	48 1/4
	D	31 1/2
	H	36
Crated Dimensions (inches)	W	49 5/8
	D	33 1/8
	H	39 3/8
Temperature Range °F		33 ~ 41°F
Compressor Power (HP)		1/5
Net Weight		211
Gross Weight		267
# of Shelves		2
NEMA Config.		5-15P
Amps		2.4

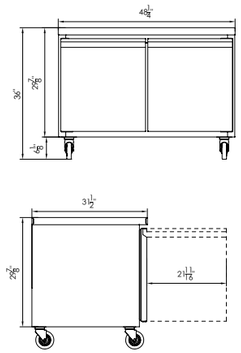

Undercounter Refrigerators Solid Door

Features


- Coved corners for easy cleaning
- Recessed door handle
- Self-closing doors with 90° stay open feature
- 5" casters with locks on front
- Shorter/smaller casters available for purchase
- Epoxy-coated removable shelves
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Stainless steel exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost




Model		GUR-60
External Dimensions (inches)	W	60 1/8
	D	31 1/2
	H	36
Crated Dimensions (inches)	W	61 5/8
	D	33 1/8
	H	39 3/8
Temperature Range °F		33 ~ 41°F
Compressor Power (HP)		1/5
Net Weight		231
Gross Weight		312
# of Shelves		2
NEMA Config.		5-15P
Amps		2.4

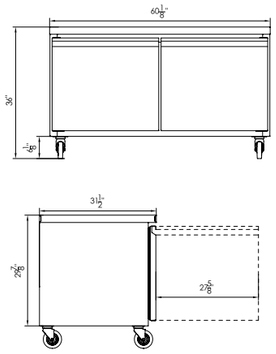



Model		GUR-72
External Dimensions (inches)	W	72 1/2
	D	31 1/2
	H	36
Crated Dimensions (inches)	W	73 7/8
	D	33 1/8
	H	39 3/8
Temperature Range °F		33 ~ 41°F
Compressor Power (HP)		1/5
Net Weight		242
Gross Weight		340
# of Shelves		3
NEMA Config.		5-15P
Amps		3.4



Undercounter Freezers Solid Door

Features


- Coved corners for easy cleaning
- Recessed door handle
- Self-closing doors with 90° stay open feature
- 5" casters with locks on front
- Shorter/smaller casters available for purchase
- Epoxy-coated removable shelves
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Stainless steel exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost




Model		GUF-29
External Dimensions (inches)	W	29 1/8
	D	31 1/2
	H	36
Crated Dimensions (inches)	W	30 1/2
	D	33 1/8
	H	39 3/8
Temperature Range °F		0 ~ -8°F
Compressor Power (HP)		1/3
Net Weight		158
Gross Weight		200
# of Shelves		1
NEMA Config.		5-15P
Amps		2.9





Model		GUF-48
External Dimensions (inches)	W	48 1/4
	D	31 1/2
	H	36
Crated Dimensions (inches)	W	49 5/8
	D	33 1/8
	H	39 3/8
Temperature Range °F		0 ~ -8°F
Compressor Power (HP)		1/2
Net Weight		211
Gross Weight		267
# of Shelves		2
NEMA Config.		5-15P
Amps		8



Undercounter Freezers Solid Door

Features


- Coved corners for easy cleaning
- Recessed door handle
- Self-closing doors with 90° stay open feature
- 5" casters with locks on front
- Shorter/smaller casters available for purchase
- Epoxy-coated removable shelves
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Stainless steel exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost




Model		GUF-60
External Dimensions (inches)	W	60 1/8
	D	31 1/2
	H	36
Crated Dimensions (inches)	W	61 5/8
	D	33 1/8
	H	39 3/8
Temperature Range °F		0 ~ -8°F
Compressor Power (HP)		1/2
Net Weight		231
Gross Weight		312
# of Shelves		2
NEMA Config.		5-15P
Amps		8





Model		GUF-72
External Dimensions (inches)	W	72 1/2
	D	31 1/2
	H	36
Crated Dimensions (inches)	W	73 7/8
	D	33 1/8
	H	39 3/8
Temperature Range °F		0 ~ -8°F
Compressor Power (HP)		3/4
Net Weight		242
Gross Weight		340
# of Shelves		3
NEMA Config.		5-15P
Amps		8



Undercounter Freezers Solid Door With Drawers

Features

- Coved corners for easy cleaning
- Recessed door handle
- Self-closing doors with 90° stay open feature
- 5" casters with locks on front
- Shorter/smaller casters available for purchase
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Stainless steel exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost



Coming soon

Model		GUR-48DWR
External Dimensions (inches)	W	48 1/4
	D	31 1/2
	H	36
Crated Dimensions (inches)	W	49 5/8
	D	33 1/8
	H	39 3/8
Temperature Range °F		33 ~ 41°F
Compressor Power (HP)		1/5
Net Weight		249
Gross Weight		305
# of Drawers		4
NEMA Config.		5-15P
Amps		2.4



Coming soon

Model		GUR-60DWR
External Dimensions (inches)	W	60 1/8
	D	31 1/2
	H	36
Crated Dimensions (inches)	W	61 5/8
	D	33 1/8
	H	39 3/8
Temperature Range °F		33 ~ 41°F
Compressor Power (HP)		1/5
Net Weight		267
Gross Weight		348
# of Drawers		4
NEMA Config.		5-15P
Amps		2.4

Salad Prep Tables

The Glacier sandwich/salad prep table and mega tops are crafted from durable brushed stainless steel, guaranteeing longevity and easy upkeep. These units cool from underneath the pan lip, bypassing the necessity for an air curtain, an innovative design to prevent product dry out. A solid stainless steel sheet beneath the pans acts as a barrier, preventing food from falling into the cavity of the unit. It comes with 1/6 pan containers for versatile food storage. Its sleek design includes recessed handles for comfort and easy cleaning. Foam insulation ensures proper cooling, while self-closing doors and auto-defrosting functionality contribute to energy efficiency and sustained cold temperatures.



Salad Prep Tables

Features

- Insulated cover
- Refrigerates from under pan lip
- Recessed door handle
- Comes complete with 1/6 pans
- Epoxy-coated removable shelves
- 5" casters with locks on front
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Stainless steel exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost







Coming soon

Model		GST-29-8
External Dimensions (inches)	W	29 1/8
	D	33 1/16
	H	43 5/8
Crated Dimensions (inches)	W	33 3/8
	D	35 7/8
	H	48 3/8
Temperature Range °F		33 ~ 41°F
Cutting Board Size WxD(inches)		29 x 14.5
Compressor Power (HP)		1/5
Net Weight		202
Gross Weight		251
# of Shelves		1
NEMA Config.		5-15P
Amps		2

Model		GST-36-10
External Dimensions (inches)	W	36 3/8
	D	33 1/16
	H	43 5/8
Crated Dimensions (inches)	W	40 5/8
	D	35 7/8
	H	48 3/8
Temperature Range °F		33 ~ 41°F
Cutting Board Size WxD(inches)		36 x 14.5
Compressor Power (HP)		1/5
Net Weight		216
Gross Weight		286
# of Shelves		2
NEMA Config.		5-15P
Amps		2.4

Model		GST-48-12
External Dimensions (inches)	W	48 1/4
	D	33 1/16
	H	43 5/8
Crated Dimensions (inches)	W	52 1/2
	D	35 7/8
	H	48 3/8
Temperature Range °F		33 ~ 41°F
Cutting Board Size WxD(inches)		48 x 14.5
Compressor Power (HP)		1/5
Net Weight		231
Gross Weight		322
# of Shelves		2
NEMA Config.		5-15P
Amps		2.4

Salad Prep Tables

Features

- Insulated cover
- Refrigerates from under pan lip
- Recessed door handle
- Comes complete with 1/6 pans
- Epoxy-coated removable shelves
- 5" casters with locks on front
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Stainless steel exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost




Model		GST-60-16
External Dimensions (inches)	W	60 1/8
	D	33 1/16
	H	43 5/8
Crated Dimensions (inches)	W	64 3/8
	D	35 7/8
	H	48 3/8
Temperature Range °F		33 ~ 41°F
Cutting Board Size WxD(inches)		60 x 14.5
Compressor Power (HP)		1/5
Net Weight		275
Gross Weight		380
# of Shelves		2
NEMA Config.		5-15P
Amps		2.4



Model		GST-72-18
External Dimensions (inches)	W	72 1/2
	D	33 1/16
	H	43 5/8
Crated Dimensions (inches)	W	64 3/8
	D	35 7/8
	H	48 3/8
Temperature Range °F		33 ~ 41°F
Cutting Board Size WxD(inches)		72 x 14.5
Compressor Power (HP)		1/3
Net Weight		341
Gross Weight		470
# of Shelves		3
NEMA Config.		5-15P
Amps		3.4

Salad Prep Tables


GST-29-8

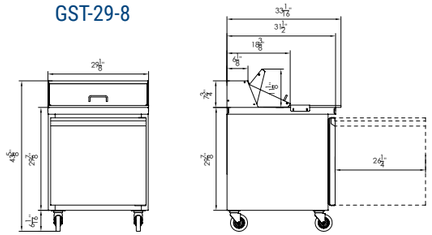

GST-29-8: 8x1/6 PAN
REGULAR TOP

1/6 1/6 1/6 1/6
1/6 1/6 1/6 1/6


GST-36-10

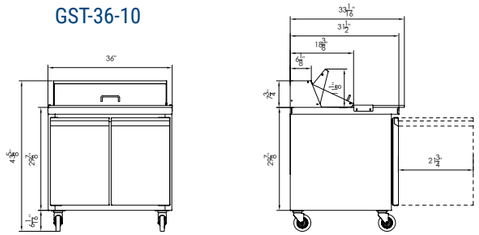

GST-36-10: 10x1/6 PAN
REGULAR TOP

1/6 1/6 1/6 1/6 1/6
1/6 1/6 1/6 1/6 1/6


GST-48-12

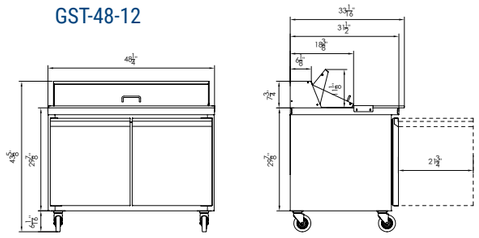

GST-48-12: 12x1/6 PAN
REGULAR TOP

1/6 1/6 1/6 1/6 1/6 1/6
1/6 1/6 1/6 1/6 1/6 1/6


GST-60-16

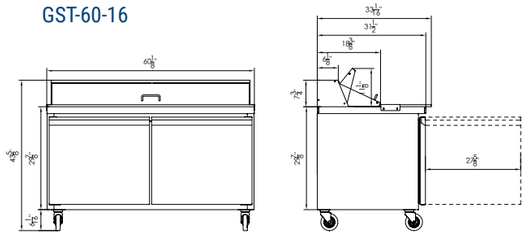

GST-60-16: 16x1/6 PAN
REGULAR TOP

1/6 1/6 1/6 1/6 1/6 1/6 1/6 1/6
1/6 1/6 1/6 1/6 1/6 1/6 1/6 1/6

GST-72-18

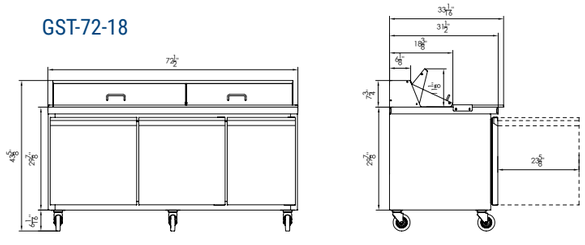

GST-72-18: 18x1/6 PAN
REGULAR TOP

1/6 1/6 1/6 1/6 1/6 1/6 1/6 1/6 1/6
1/6 1/6 1/6 1/6 1/6 1/6 1/6 1/6 1/6

Mega Tops

The Glacier sandwich/salad prep table and mega tops are crafted from durable brushed stainless steel, guaranteeing longevity and easy upkeep. These units cool from underneath the pan lip, bypassing the necessity for an air curtain, an innovative design to prevent product dry out. A solid stainless steel sheet beneath the pans acts as a barrier, preventing food from falling into the cavity of the unit. It comes with 1/6 pan containers for versatile food storage. Its sleek design includes recessed handles for comfort and easy cleaning. Foam insulation ensures proper cooling, while self-closing doors and auto-defrosting functionality contribute to energy efficiency and sustained cold temperatures.



Mega Tops

Features

- Insulated cover
- Refrigerates from under pan lip
- Recessed door handle
- Comes complete with 1/6 pans
- Epoxy-coated removable shelves
- 5" casters with locks on front
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Stainless steel exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost



Coming soon

Model		GMT-29-12
External Dimensions (inches)	W	29 1/8
	D	34 5/8
	H	45 3/4
Crated Dimensions (inches)	W	33 3/8
	D	35 7/8
	H	50 1/2
Temperature Range °F		33 ~ 41°F
Cutting Board Size WxD(inches)		29 x 9
Compressor Power (HP)		1/5
Net Weight		202
Gross Weight		256
# of Shelves		1
NEMA Config.		5-15P
Amps		2

Model		GMT-36-15
External Dimensions (inches)	W	36 3/8
	D	34 5/8
	H	45 3/4
Crated Dimensions (inches)	W	40 5/8
	D	35 7/8
	H	50 1/2
Temperature Range °F		33 ~ 41°F
Cutting Board Size WxD(inches)		36 x 9
Compressor Power (HP)		1/5
Net Weight		216
Gross Weight		291
# of Shelves		2
NEMA Config.		5-15P
Amps		2.4

Model		GMT-48-18
External Dimensions (inches)	W	48 1/4
	D	34 5/8
	H	45 3/4
Crated Dimensions (inches)	W	52 1/2
	D	35 7/8
	H	50 1/2
Temperature Range °F		33 ~ 41°F
Cutting Board Size WxD(inches)		48 x 9
Compressor Power (HP)		1/5
Net Weight		231
Gross Weight		327
# of Shelves		2
NEMA Config.		5-15P
Amps		2.4

Mega Tops

Features

- Insulated cover
- Refrigerates from under pan lip
- Recessed door handle
- Comes complete with 1/6 pans
- Epoxy-coated removable shelves
- 5" casters with locks on front
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Stainless steel exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost




Model		GMT-60-24
External Dimensions (inches)	W	60 1/8
	D	34 5/8
	H	45 3/4
Crated Dimensions (inches)	W	64 3/8
	D	35 7/8
	H	50 1/2
Temperature Range °F		33 ~ 41°F
Cutting Board Size WxD(inches)		60 x 9
Compressor Power (HP)		1/5
Net Weight		275
Gross Weight		385
# of Shelves		2
NEMA Config.		5-15P
Amps		2.4



Model		GMT-72-30
External Dimensions (inches)	W	72 1/2
	D	34 5/8
	H	45 3/4
Crated Dimensions (inches)	W	33 3/8
	D	35 7/8
	H	50 1/2
Temperature Range °F		33 ~ 41°F
Cutting Board Size WxD(inches)		72 x 9
Compressor Power (HP)		1/3
Net Weight		341
Gross Weight		475
# of Shelves		3
NEMA Config.		5-15P
Amps		3.4

Mega Tops


GMT-29-12

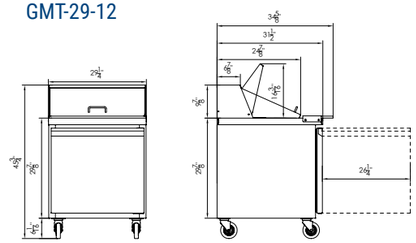

GMT-29-12: 12x1/6 PAN
MEGA TOP




GMT-36-15

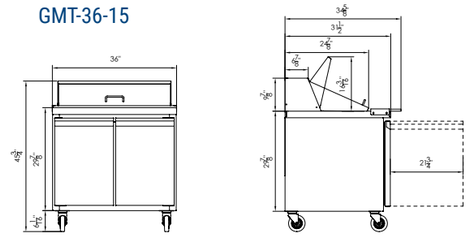

GMT-36-15: 15x1/6 PAN
MEGA TOP




GMT-48-18

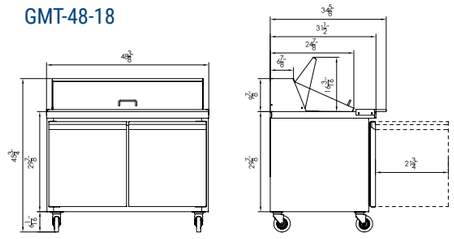

GMT-48-18: 18x1/6 PAN
MEGA TOP




GMT-60-24

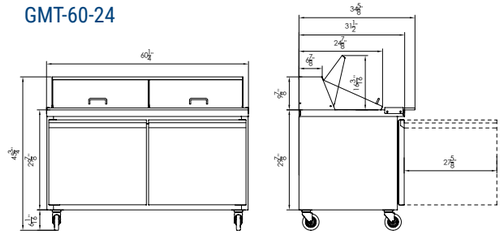


GMT-60-24: 24x1/6 PAN
MEGA TOP



GMT-72-30

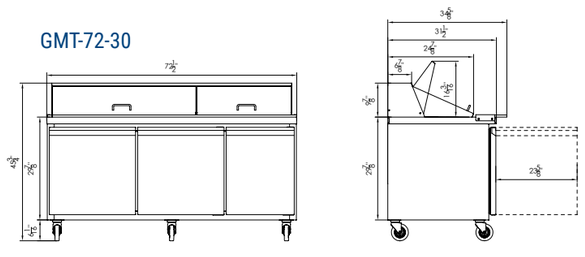

GMT-72-30: 30x1/6 PAN
MEGA TOP



Salad Prep Tables With Drawers

The Glacier sandwich/salad prep table and mega tops are crafted from durable brushed stainless steel, guaranteeing longevity and easy upkeep. These units cool from underneath the pan lip, bypassing the necessity for an air curtain, an innovative design to prevent product dry out. A solid stainless steel sheet beneath the pans acts as a barrier, preventing food from falling into the cavity of the unit. It comes with 1/6 pan containers for versatile food storage. Its sleek design includes recessed handles for comfort and easy cleaning. Foam insulation ensures proper cooling, while self-closing doors and auto-defrosting functionality contribute to energy efficiency and sustained cold temperatures.



Coming soon

Salad Prep Tables With Drawers

Features

- Insulated cover
- Refrigerates from under pan lip
- Recessed door handle
- Comes complete with 1/6 pans
- 5" casters with locks on front
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Stainless steel exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost



Coming soon

Model		GST-48-12DWR
External Dimensions (inches)	W	48 1/4
	D	33 1/16
	H	43 5/8
Crated Dimensions (inches)	W	52 1/2
	D	35 7/8
	H	48 3/8
Temperature Range °F		33 ~ 41°F
Cutting Board Size WxD(inches)		48 x 14.5
Compressor Power (HP)		1/5
Net Weight		262
Gross Weight		352
# of Drawers		4
NEMA Config.		5-15P
Amps		2.4



Coming soon

Model		GST-60-16DWR
External Dimensions (inches)	W	60 1/8
	D	33 1/16
	H	43 5/8
Crated Dimensions (inches)	W	64 3/8
	D	35 7/8
	H	48 3/8
Temperature Range °F		33 ~ 41°F
Cutting Board Size WxD(inches)		60 x 14.5
Compressor Power (HP)		1/5
Net Weight		305
Gross Weight		410
# of Drawers		4
NEMA Config.		5-15P
Amps		2.4

Mega Tops With Drawers

The Glacier sandwich/salad prep table and mega tops are crafted from durable brushed stainless steel, guaranteeing longevity and easy upkeep. These units cool from underneath the pan lip, bypassing the necessity for an air curtain, an innovative design to prevent product dry out. A solid stainless steel sheet beneath the pans acts as a barrier, preventing food from falling into the cavity of the unit. It comes with 1/6 pan containers for versatile food storage. Its sleek design includes recessed handles for comfort and easy cleaning. Foam insulation ensures proper cooling, while self-closing doors and auto-defrosting functionality contribute to energy efficiency and sustained cold temperatures.



Coming soon

Mega Tops With Drawers

Features

- Insulated cover
- Refrigerates from under pan lip
- Recessed door handle
- Comes complete with 1/6 pans
- 5" casters with locks on front
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Stainless steel exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost



Coming soon

Model		GMT-48-18DWR
External Dimensions (inches)	W	48 1/4
	D	34 5/8
	H	45 3/4
Crated Dimensions (inches)	W	52 1/2
	D	35 7/8
	H	50 1/2
Temperature Range °F		33 ~ 41°F
Cutting Board Size WxD(inches)		48 x 9
Compressor Power (HP)		1/5
Net Weight		266
Gross Weight		357
# of Drawers		4
NEMA Config.		5-15P
Amps		2.4



Coming soon

Model		GMT-60-24DWR
External Dimensions (inches)	W	60 1/8
	D	34 5/8
	H	45 3/4
Crated Dimensions (inches)	W	64 3/8
	D	35 7/8
	H	50 1/2
Temperature Range °F		33 ~ 41°F
Cutting Board Size WxD(inches)		60 x 9
Compressor Power (HP)		1/5
Net Weight		310
Gross Weight		415
# of Drawers		4
NEMA Config.		5-15P
Amps		2.4

Pizza Prep Tables

The Glacier commercial pizza prep table has both durability and modern functionality. Crafted from heavy-duty stainless steel to work in the most demanding kitchen environments. Keep toppings and ingredients fresh and organized with the insulated hinged cover and multiple pan containers provided. Conveniently store additional items in the bottom compartment, made possible by a removable wire shelf that offers adjustable configurations. With a temperature range of 33°F to 41°F, it efficiently chills and safely preserves various foods.



GPP-44: 6x1/3 PAN



GPP-70: 9x1/3 PAN



GPP-90: 12x1/3 PAN



Pizza Prep Tables

Features

- Insulated hinged cover
- Recessed door handle
- Comes complete with 1/3 pans
- Side mounted compressor
- Epoxy-coated removable shelves
- 5" casters with locks on front
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Stainless steel exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost








Model		GPP-44
External Dimensions (inches)	W	44 5/8
	D	35 3/8
	H	43 7/8
Crated Dimensions (inches)	W	46 1/8
	D	35 7/8
	H	48 3/8
Temperature Range °F		33 ~ 41°F
Compressor Power (HP)		1/5
Net Weight		224
Gross Weight		314
# of Shelves		1
NEMA Config.		5-15P
Amps		2.7

Model		GPP-70
External Dimensions (inches)	W	70
	D	35 3/8
	H	43 7/8
Crated Dimensions (inches)	W	71 3/8
	D	35 7/8
	H	48 3/8
Temperature Range °F		33 ~ 41°F
Compressor Power (HP)		1/5
Net Weight		297
Gross Weight		417
# of Shelves		2
NEMA Config.		5-15P
Amps		2.8

Model		GPP-90
External Dimensions (inches)	W	90 3/8
	D	35 3/8
	H	43 7/8
Crated Dimensions (inches)	W	91 3/8
	D	35 7/8
	H	48 3/8
Temperature Range °F		33 ~ 41°F
Compressor Power (HP)		1/2
Net Weight		423
Gross Weight		573
# of Shelves		3
NEMA Config.		5-15P
Amps		8.5

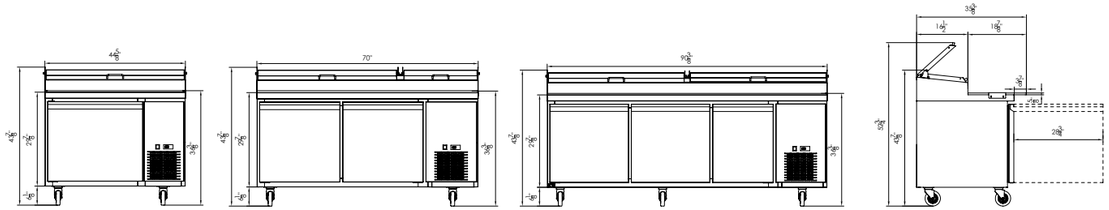

Chef Bases

The Glacier chef base supports heavy duty cooking equipment with its sturdy stainless steel top and adjustable corner edges to keep equipment in place. Recessed drawer handles allow for easy opening. Each drawer has dense foam and gaskets to effectively retain cold air. A large, self-lubricating evaporator fan ensures consistent airflow throughout the cabinet, maintaining optimal temperatures for food storage. Temperatures can be easily adjusted between 33°F and 38°F using the digital display mounted on the exterior. For seamless service access, cooling components are self-contained and can be conveniently slid out from the side when needed.



Chef Bases

Features

- Foamed-in-place insulation
- High weight bearing rails
- Recessed door handle
- Digital temperature controls with LED display
- Removable door gaskets
- 3" casters with locks on front
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Stainless steel exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost










Model		GCB-36
External Dimensions (inches)	W	36
	D	32 1/4
	H	25
Crated Dimensions (inches)	W	37 5/8
	D	34 1/4
	H	26 5/8
Drawers		2
Net Weight		176
Gross Weight		204
Compressor Power (HP)		1/5
1/6 Pan Count		2 x 9
Amps		1.7


Model		GCB-48
External Dimensions (inches)	W	48
	D	32 1/4
	H	25
Crated Dimensions (inches)	W	49 5/8
	D	34 1/4
	H	26 5/8
Drawers		2
Net Weight		210
Gross Weight		248
Compressor Power (HP)		1/5
1/6 Pan Count		2 x 15
Amps		1.7


Model		GCB-52
External Dimensions (inches)	W	52 1/2
	D	32 1/4
	H	25
Crated Dimensions (inches)	W	54 1/8
	D	34 1/4
	H	26 5/8
Drawers		2
Net Weight		242
Gross Weight		286
Compressor Power (HP)		1/5
1/6 Pan Count		2 x 18
Amps		2.2














Chef Bases

Features

- Foamed-in-place insulation
- High weight bearing rails
- Recessed door handle
- Digital temperature controls with LED display
- Removable door gaskets
- 3" casters with locks on front
- 2-year parts and labour warranty
- 5-year compressor warranty


Technical Specifications

- Stainless steel exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost






Model		GCB-60
External Dimensions (inches)	W	60
	D	32 1/4
	H	25
Crated Dimensions (inches)	W	61
	D	34 1/4
	H	26 5/8
Drawers		2
Net Weight		246
Gross Weight		294
Compressor Power (HP)		1/5
1/6 Pan Count		2 x 18
Amps		2.2

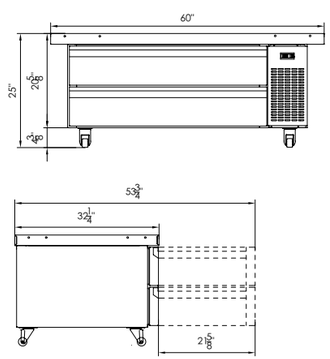


Model		GCB-72
External Dimensions (inches)	W	72
	D	32 1/4
	H	25
Crated Dimensions (inches)	W	73 5/8
	D	34 1/4
	H	26 5/8
Drawers		4
Net Weight		308
Gross Weight		366
Compressor Power (HP)		1/5
1/6 Pan Count		4 x 12
Amps		2.2

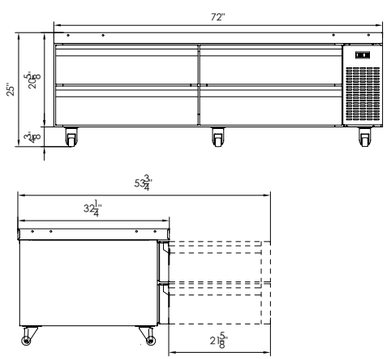


Chef Bases

Pan Layout per model


GCB-36

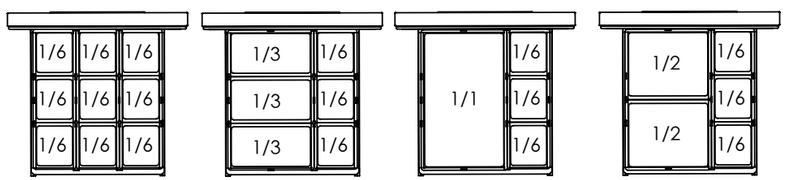


GCB-48

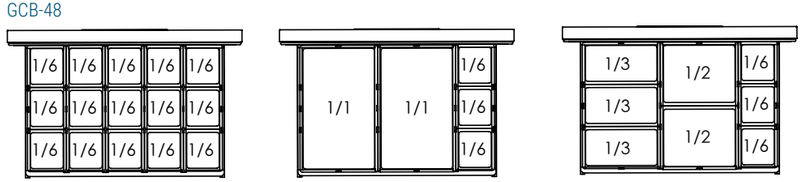


GCB-52



GCB-60



GCB-72

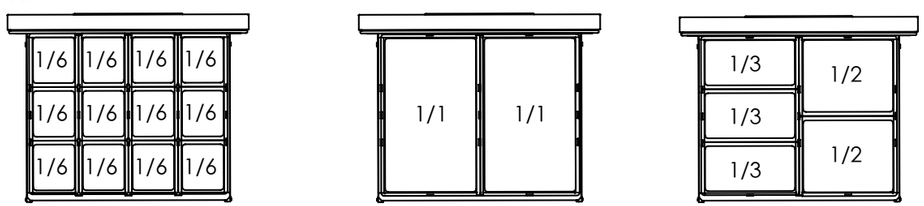

Back Bar Coolers

The Glacier back bar refrigerator series offers efficient beverage chilling and organization while maximizing space utilization. Choose from solid door, hinged glass door, or sliding glass door configurations, all of which are lockable, with options for 4 or 6 adjustable and removable wire shelves and bottle rails to customize storage. Featuring precision digital temperature controls, these refrigerators maintain beverages at the optimal serving temperature between 33°F and 38°F. The glass and sliding door models are equipped with double pane tempered glass to block UV light and enhance visibility, ensuring beverage quality.



Back Bars Solid Door

Features

- Door locks
- LED lighting
- Digital temperature controls with LED display
- 4 or 6 adjustable and removable wire shelves
- Bottle rails/dividers
- Side mounted compressor
- Casters
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Black exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost










Model		GBB-49
External Dimensions (inches)	W	49 7/8
	D	24 3/8
	H	38 3/4
Crated Dimensions (inches)	W	51 3/8
	D	26
	H	42 1/8
Temperature Range °F		33 ~ 38°F
Compressor Power (HP)		1/3
Net Weight		198
Gross Weight		238
# of Shelves		4
NEMA Config.		5-15P
Amps		3.5

Model		GBB-61
External Dimensions (inches)	W	56 7/8
	D	24 3/8
	H	38 3/4
Crated Dimensions (inches)	W	58 4/8
	D	26
	H	42 1/8
Temperature Range °F		33 ~ 38°F
Compressor Power (HP)		1/3
Net Weight		220
Gross Weight		270
# of Shelves		4
NEMA Config.		5-15P
Amps		3.5

Model		GBB-73
External Dimensions (inches)	W	70 3/8
	D	24 3/8
	H	38 3/4
Crated Dimensions (inches)	W	72
	D	26
	H	42 1/8
Temperature Range °F		33 ~ 38°F
Compressor Power (HP)		1/3
Net Weight		264
Gross Weight		324
# of Shelves		6
NEMA Config.		5-15P
Amps		3.5







Back Bars Hinged Glass Door

Features

- Tempered hinged glass doors
- Door locks
- LED lighting
- Digital temperature controls with LED display
- 2, 4 or 6 adjustable and removable wire shelves
- Bottle rails/dividers
- Side mounted compressor
- Casters
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Black exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost




Coming soon










Model		GBB-24G	GBB-49G	GBB-61G	GBB-73G
External Dimensions (inches)	W	23 5/8	49 3/4	56 7/8	70 3/8
	D	20 1/2	24 3/8	24 3/8	24 3/8
	H	35 2/5	38 3/4	38 3/4	38 3/4
Crated Dimensions (inches)	W	26	51 3/8	58 4/8	72
	D	22 2/5	26	26	26
	H	38 3/5	42 1/8	42 1/8	42 1/8
Temperature Range °F		33 ~ 38°F	33 ~ 38°F	33 ~ 38°F	33 ~ 38°F
Compressor Power (HP)		1/4	1/3	1/3	1/3
Net Weight		106	198	220	264
Gross Weight		128	236	268	322
# of Shelves		2	4	4	6
NEMA Config.		5-15P	5-15P	5-15P	5-15P
Amps		2.0	3.5	3.5	3.5









Back Bars Sliding Glass Door

Features

- Tempered sliding glass doors
- Door locks
- LED lighting
- Digital temperature controls with LED display
- 4 or 6 adjustable and removable wire shelves
- Bottle rails/dividers
- Side mounted compressor
- Casters
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Black exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost










Model		GBB-49GSD
External Dimensions (inches)	W	49 3/4
	D	24 3/8
	H	38 3/4
Crated Dimensions (inches)	W	51 3/8
	D	26
	H	42 1/8
Temperature Range °F		33 ~ 38°F
Compressor Power (HP)		1/3
Net Weight		198
Gross Weight		236
# of Shelves		4
NEMA Config.		5-15P
Amps		3.5

Model		GBB-61GSD
External Dimensions (inches)	W	56 7/8
	D	24 3/8
	H	38 3/4
Crated Dimensions (inches)	W	58 4/8
	D	26
	H	42 1/8
Temperature Range °F		33 ~ 38°F
Compressor Power (HP)		1/3
Net Weight		220
Gross Weight		268
# of Shelves		4
NEMA Config.		5-15P
Amps		3.5

Model		GBB-73GSD
External Dimensions (inches)	W	70 3/8
	D	24 3/8
	H	38 3/4
Crated Dimensions (inches)	W	72
	D	26
	H	42 1/8
Temperature Range °F		33 ~ 38°F
Compressor Power (HP)		1/3
Net Weight		264
Gross Weight		322
# of Shelves		6
NEMA Config.		5-15P
Amps		3.5







Kegerators

The Glacier draft beer system offers ample space to accommodate various kegs of beer. With a single tube and handle design, this system prioritizes bacterial resistance during dispensing, while any spills are caught by the integrated drip tray, maintaining a clean countertop surface. To enhance cooling efficiency, the doors are securely sealed with magnetic gaskets. Users can easily adjust the temperature of the draft beer cooler between 33°F and 38°F using electronic controls. The unit features automatic defrosting capabilities to minimize ice buildup, and its epoxy coated evaporator coil ensures resistance to corrosion over time. Constructed with durable stainless steel, the top of the unit doubles as a convenient workstation, providing a surface that is easy to wipe clean after use.



Kegerators

Features

- Stainless steel top with drip tray
- Dual tap towers (except GDD-1)
- Magnetic door gaskets
- Digital temperature controls with LED display
- Side mounted compressor
- Casters
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Black exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost




Coming soon


Model		GDD-1	GDD-49	GDD-61	GDD-73
External Dimensions (inches)	W	23 1/2	49 7/8	56 7/8	70 3/8
	D	31 1/2	27 3/4	27 3/4	27 3/4
	H	50 5/8	47 7/8	47 7/8	47 7/8
Crated Dimensions (inches)	W	25	51 3/8	58 4/8	72
	D	33 1/8	29 3/8	29 3/8	29 3/8
	H	44 7/8	42 1/8	42 1/8	42 1/8
Temperature Range °F		33 ~ 38°F	33 ~ 38°F	33 ~ 38°F	33 ~ 38°F
Compressor Power (HP)		1/5	1/5	1/5	1/4
Net Weight		121	218	237	284
Gross Weight		149	258	287	344
NEMA Config.		5-15P	5-15P	5-15P	5-15P
Amps		3.5	3.5	3.5	3.5

Kegerators


GDD-1

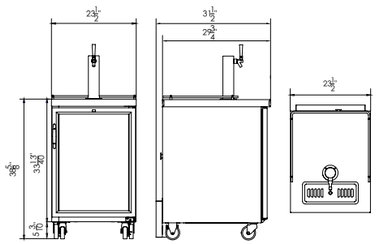


GDD-49

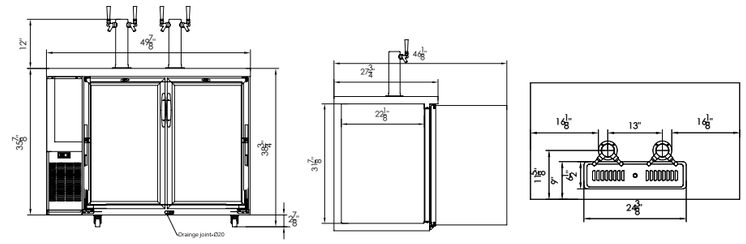

GDD-61

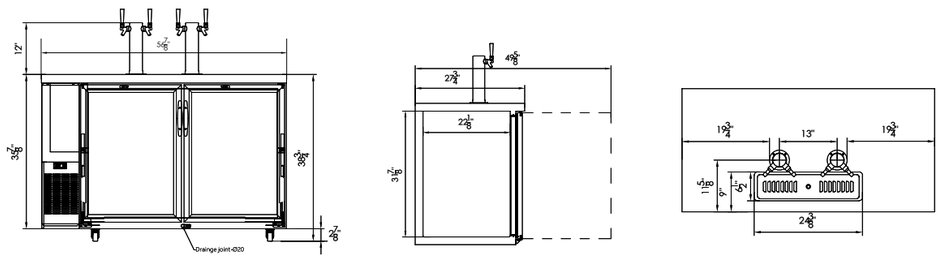


GDD-73

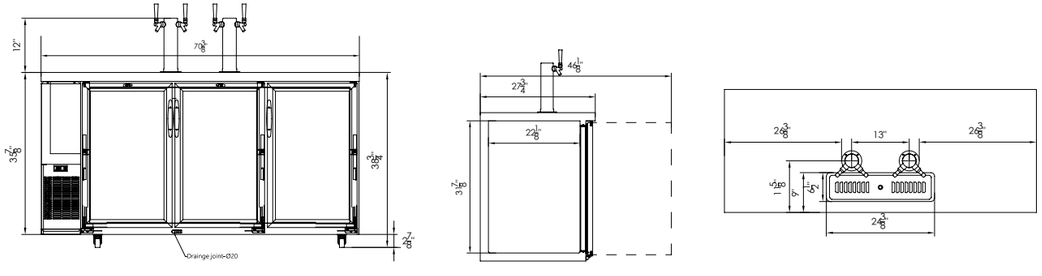


Keg configuration per model


GDD-49

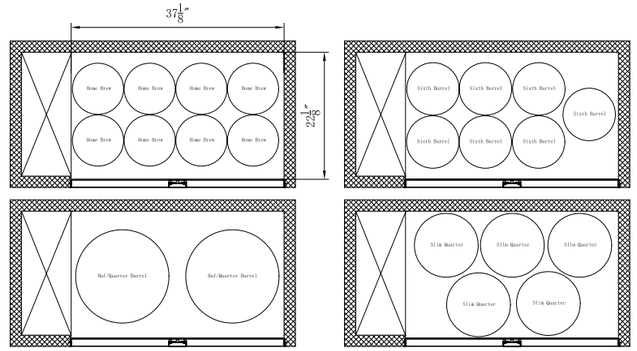

GDD-61

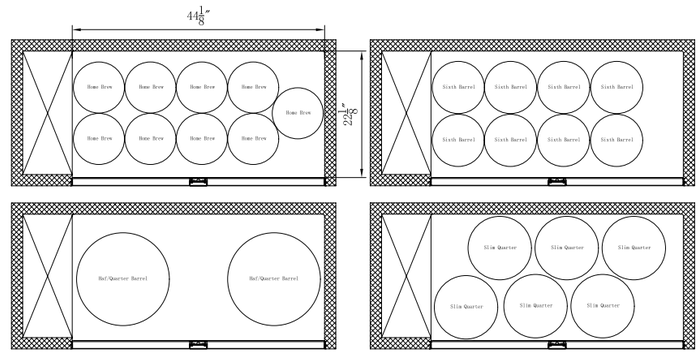

GDD-73

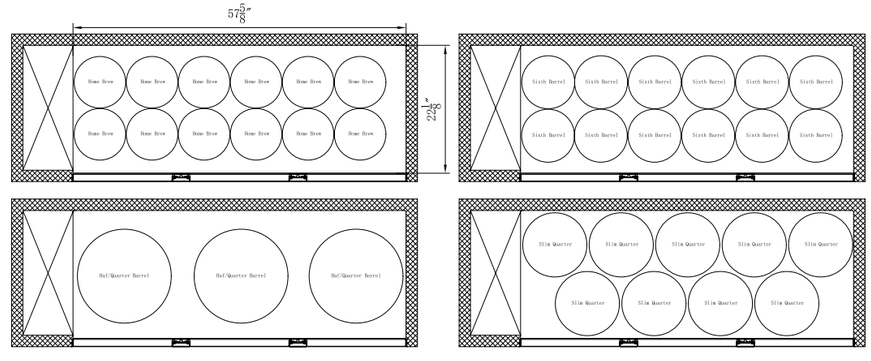

Glass Door Merchandisers

The Glacier glass door merchandiser series of coolers and freezers is expertly crafted to beautifully showcase a diverse range of merchandise. Cooler models are available in either hinged or sliding doors. Equipped with bright LED lighting and a backlit marquee, these units captivate attention in high-traffic areas. The intuitive digital temperature control LED display allows for precise temperature selection, while its heavy duty, bottom mounted compressor enhances efficiency. Organizing products of any size is effortless, using its adjustable and removable wire shelves, and drink dividers (in cooler models).



Glass Door Merchandisers

Features


- Tempered hinged glass doors
- Door locks
- LED lighting
- Digital temperature controls with LED display
- Adjustable and removable wire shelves
- Bottle rails/dividers
- Casters
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Black exterior finish
- White interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost




Model		GM-12R
External Dimensions (inches)	W	24 3/4
	D	26
	H	69 1/8
Crated Dimensions (inches)	W	26 3/4
	D	27
	H	71 1/8
Temperature Range °F		33 ~ 40°F
Net Weight		204
Gross Weight		251
# of Shelves		4
Compressor Power (HP)		1/5
NEMA Config.		5-15P
Amps		2.3





Model		GM-15R
External Dimensions (inches)	W	24 3/8
	D	27 3/8
	H	80 3/4
Crated Dimensions (inches)	W	26 7/8
	D	28 7/9
	H	82 3/8
Temperature Range °F		33 ~ 40°F
Net Weight		241
Gross Weight		291
# of Shelves		4
Compressor Power (HP)		1/5
NEMA Config.		5-15P
Amps		2.3



Glass Door Merchandisers

Features

- Tempered hinged glass doors
- Door locks
- LED lighting
- Digital temperature controls with LED display
- Adjustable and removable wire shelves
- Bottle rails/dividers
- Side mounted compressor
- Casters
- 2-year parts and labour warranty
- 5-year compressor warranty


Technical Specifications

- Black exterior finish
- White interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost

AutoQuotes




Model		GM-19R
External Dimensions (inches)	W	29 1/2
	D	27 7/8
	H	78 7/8
Crated Dimensions (inches)	W	30 7/8
	D	28 7/8
	H	80 7/8
Temperature Range °F		33 ~ 40°F
Net Weight		266
Gross Weight		328
# of Shelves		5
Compressor Power (HP)		1/3
NEMA Config.		5-15P
Amps		3.2

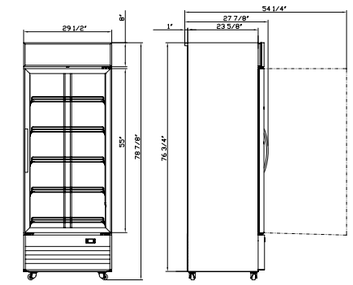



Model		GM-33R
External Dimensions (inches)	W	39 3/8
	D	31 7/8
	H	80 3/8
Crated Dimensions (inches)	W	41 3/8
	D	32 1/2
	H	82 3/8
Temperature Range °F		33 ~ 40°F
Net Weight		327
Gross Weight		394
Casters Count		4
# of Shelves		10
Compressor Power (HP)		1/3
NEMA Config.		5-15P
Amps		3.8

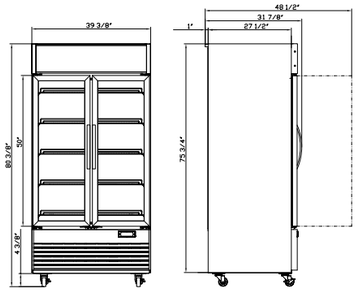

Glass Door Merchandisers

Features

- Tempered hinged glass doors
- Door locks
- LED lighting
- Digital temperature controls with LED display
- Adjustable and removable wire shelves
- Bottle rails/dividers
- Casters
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Black exterior finish
- White interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost

AutoQuotes




Model		GM-41R
External Dimensions (inches)	W	47 1/4
	D	31 7/8
	H	80 3/8
Crated Dimensions (inches)	W	49 1/4
	D	32 1/2
	H	82 3/8
Temperature Range °F		33 ~ 40°F
Net Weight		363
Gross Weight		435
Casters Count		4
# of Shelves		10
Compressor Power (HP)		1/2
NEMA Config.		5-15P
Amps		8.8





Model		GM-48R
External Dimensions (inches)	W	54 1/8
	D	31 7/8
	H	80 3/8
Crated Dimensions (inches)	W	56 1/8
	D	32 1/2
	H	82 3/8
Temperature Range °F		33 ~ 40°F
Net Weight		385
Gross Weight		462
Casters Count		4
# of Shelves		10
Compressor Power (HP)		1/2
NEMA Config.		5-15P
Amps		9.2



Model		GM-69R
External Dimensions (inches)	W	78
	D	31 7/8
	H	80 3/8
Crated Dimensions (inches)	W	80
	D	32 7/8
	H	82 3/8
Temperature Range °F		33 ~ 40°F
Net Weight		506
Gross Weight		586
Casters Count		6
# of Shelves		15
Compressor Power (HP)		1/2
NEMA Config.		5-20P
Amps		10



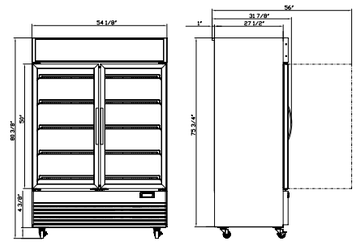

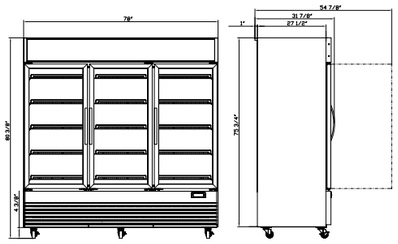

Glass Sliding Door Merchandisers

Features

- Tempered sliding glass doors
- LED lighting
- Digital temperature controls with LED display
- 4 or 6 adjustable and removable wire shelves
- Bottle rails/dividers
- Side mounted compressor
- Casters
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Black exterior finish
- White interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost








Model		GM-32SD
External Dimensions (inches)	W	39 3/8
	D	31 7/8
	H	80 1/4
Crated Dimensions (inches)	W	40 3/4
	D	32 7/8
	H	82 1/4
Temperature Range °F		33 ~ 40°F
Net Weight		327
Gross Weight		394
Casters Count		4
# of Shelves		10
Compressor Power (HP)		1/3
NEMA Config.		5-15P
Amps		3.8

Model		GM-40SD
External Dimensions (inches)	W	47 1/4
	D	31 7/8
	H	80 1/4
Crated Dimensions (inches)	W	49 1/4
	D	32 7/8
	H	82 1/4
Temperature Range °F		33 ~ 40°F
Net Weight		363
Gross Weight		435
Casters Count		4
# of Shelves		10
Compressor Power (HP)		1/2
NEMA Config.		5-15P
Amps		8.8

Model		GM-47SD
External Dimensions (inches)	W	54 1/8
	D	31 7/8
	H	80 1/4
Crated Dimensions (inches)	W	56 1/8
	D	32 7/8
	H	82 1/4
Temperature Range °F		33 ~ 40°F
Net Weight		385
Gross Weight		462
Casters Count		4
# of Shelves		10
Compressor Power (HP)		1/2
NEMA Config.		5-15P
Amps		9.2

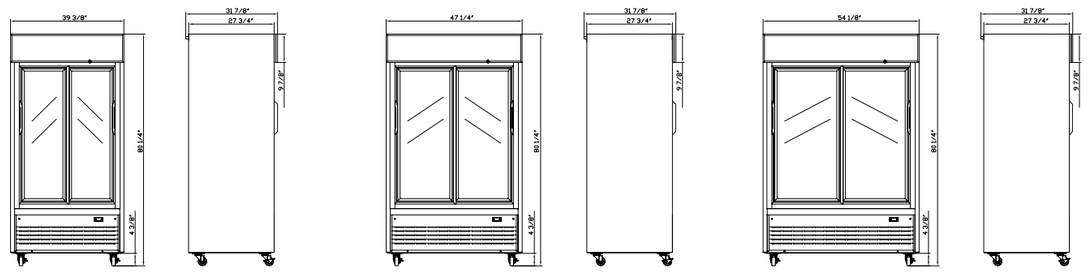

Glass Door Merchandiser Freezers

Features

- Tempered hinged glass doors
- Door locks
- LED lighting
- Digital temperature controls with LED display
- Adjustable and removable wire shelves
- Bottle rails/dividers
- Casters
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Black exterior finish
- White interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost







Coming soon


Model		GM-15F
External Dimensions (inches)	W	27 1/8
	D	29 1/4
	H	80 3/8
Crated Dimensions (inches)	W	28 1/2
	D	30 1/4
	H	82 3/8
Temperature Range °F		0 ~ -8°F
Net Weight		194
Gross Weight		228
Casters Count		4
# of Shelves		4
Compressor Power (HP)		3/4
NEMA Config.		5-15P
Amps		3.1

Coming soon

Model		GM-41F
External Dimensions (inches)	W	47 1/4
	D	29 1/4
	H	80 3/8
Crated Dimensions (inches)	W	48 5/8
	D	30 1/4
	H	82 3/8
Temperature Range °F		0 ~ -8°F
Net Weight		353
Gross Weight		428
Casters Count		4
# of Shelves		10
Compressor Power (HP)		1
NEMA Config.		5-15P
Amps		8.6

Coming soon

Model		GM-69F
External Dimensions (inches)	W	78
	D	29 1/4
	H	80 3/8
Crated Dimensions (inches)	W	79 3/8
	D	30 1/4
	H	82 3/8
Temperature Range °F		0 ~ -8°F
Net Weight		518
Gross Weight		598
Casters Count		6
# of Shelves		15
Compressor Power (HP)		
NEMA Config.		5-20P
Amps		16

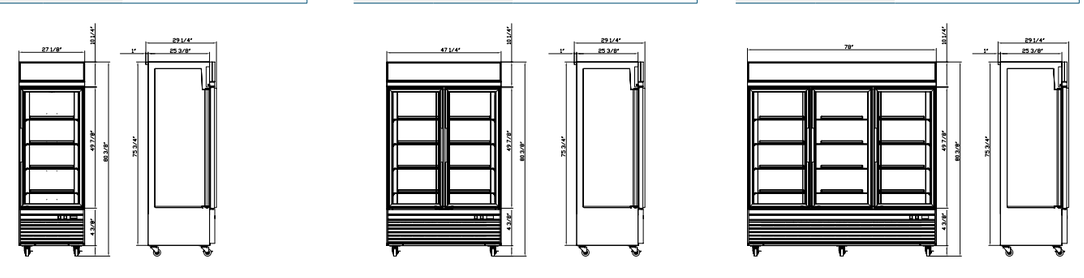

Refrigerated Display Cases

The Glacier pastry display case will attract customers with its sleek and modern design that features tempered glass and interior LED lighting. The digital temperature control and automatic defrost system ensures optimal preservation for your products. Built to last with a stainless steel interior and exterior finish, these cases come in a variety of sizes to fit your needs, from 36 to 72 inches wide.



Refrigerated Display Cases

Features

- Tempered glass
- Three tiered shelves
- LED lighting
- Digital temperature controls with LED display
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Stainless steel exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost





Model		GDC-36SQ
External Dimensions (inches)	W	36
	D	30
	H	51
Crated Dimensions (inches)	W	39 3/8
	D	33 1/2
	H	56 1/4
Temperature Range °F		33 ~ 41°F
Compressor Power (HP)		4/9
Net Weight		441
Gross Weight		507
# of Shelves		3
NEMA Config.		5-15P
Amps		3.8

Model		GDC-48SQ
External Dimensions (inches)	W	48
	D	30
	H	51
Crated Dimensions (inches)	W	51 1/8
	D	33 1/2
	H	56 1/4
Temperature Range °F		33 ~ 41°F
Compressor Power (HP)		4/9
Net Weight		507
Gross Weight		573
# of Shelves		3
NEMA Config.		5-15P
Amps		5.4

Refrigerated Display Cases

Features

- Tempered glass
- Three tiered shelves
- LED lighting
- Digital temperature controls with LED display
- 2-year parts and labour warranty
- 5-year compressor warranty

Technical Specifications

- Stainless steel exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost







Model		GDC-60SQ
External Dimensions (inches)	W	60
	D	30
	H	51
Crated Dimensions (inches)	W	63
	D	33 1/2
	H	56 1/4
Temperature Range °F		33 ~ 41°F
Compressor Power (HP)		4/9
Net Weight		573
Gross Weight		650
# of Shelves		3
NEMA Config.		5-15P
Amps		7.2

Model		GDC-72SQ
External Dimensions (inches)	W	72
	D	30
	H	51
Crated Dimensions (inches)	W	74 3/4
	D	33 1/2
	H	56 1/4
Temperature Range °F		33 ~ 41°F
Compressor Power (HP)		4/7
Net Weight		661
Gross Weight		749
# of Shelves		3
NEMA Config.		5-15P
Amps		8.9


GDC-36SQ

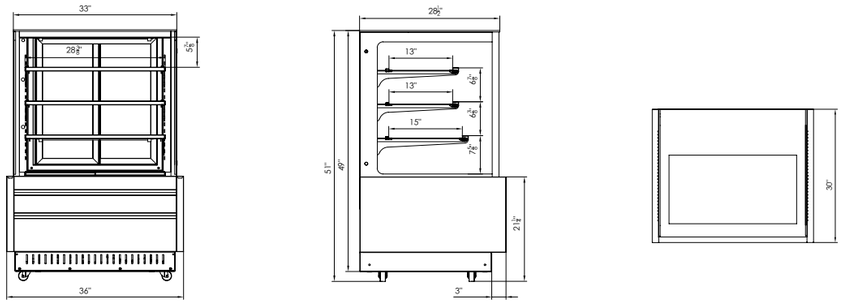


GDC-48SQ

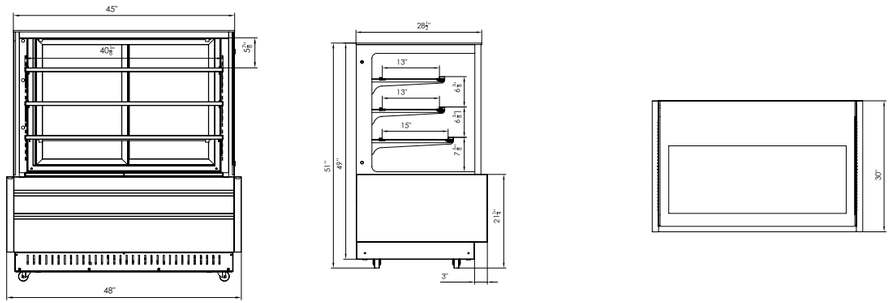

GDC-60SQ

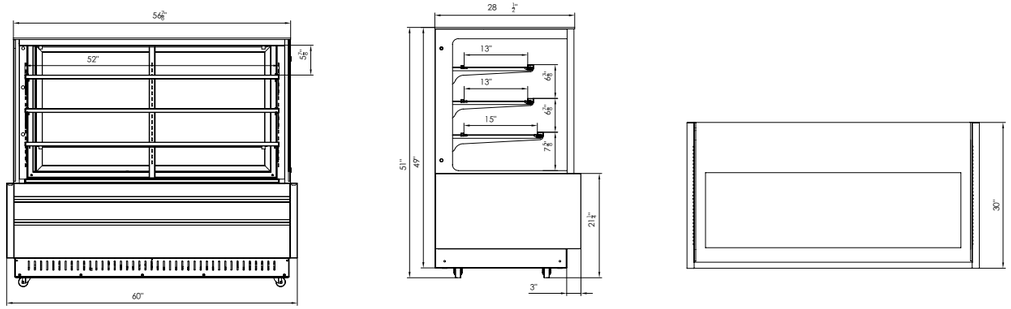

GDC-72SQ

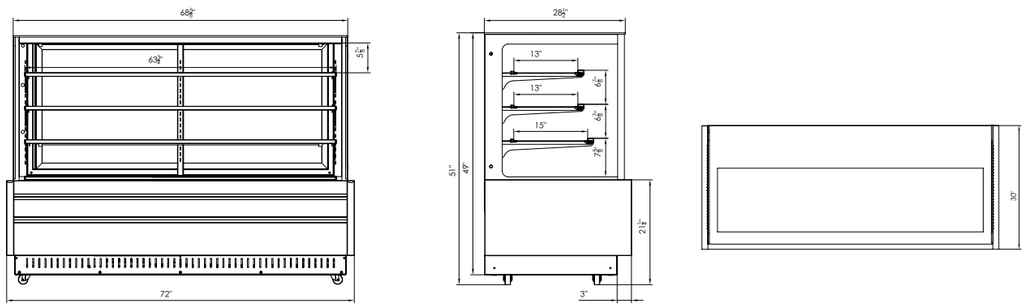

inferno

COOKING
WITHOUT LIMITS



49 COOKING LINE

51 Ranges
57 Hot Plates
61 Charbroilers
63 Griddles
67 Fryers
69 Stock Pot Ranges
71 Salamander
73 Cheesemelter

COOKING WITHOUT LIMITS

CONTENT

SANITATION C US

Ranges

The Inferno gas range series is strong and durable, perfect for busy commercial kitchens. Available in 24", 36" and 60" configurations; all units can be specified in natural gas or liquid propane. Ranges come with liftoff anti-clogging burners, manual griddles or both. Ovens come standard with 2 chrome racks, and even the 24" range will accommodate 18" x 26" sheet pans.



SANITATION C US

Ranges


Features

- All burner or all griddle configurations
- 30,000 BTU/hr anti-clogging lift-off burner heads
- 26,000 BTU/hr griddle plate
- 3/4" thick polished steel griddle plates
- 30,000 BTU/hr oven
- Oven temperatures from 175°F to 500°F
- 2 chrome racks included
- Fits 18" x 26" sheet pans
- Porcelain oven interior for easy cleaning
- Units available in natural gas or liquid propane
- 1 year parts and labour warranty

SANITATION C US




Model		IR24-4B (4 Burner)			
External Dimensions (inches)	W	24			
	D	31 1/2			
	H	56			
Crated Dimensions (inches)	W	26			
	D	36 4/5			
	H	38 1/4			
Net Weight		267.94			
Gross Weight		335.94			
Gas Source		LPG		NAT	
Burner Count		Open Burner	Oven	Open Burner	Oven
		4	1	4	1
Single Burner		30000	30000	33000	30000
Total Output (BTU)		150000		162000	
Orifice Size		52		41	40
Gas Pressure		10 in. WC		5 in. WC	

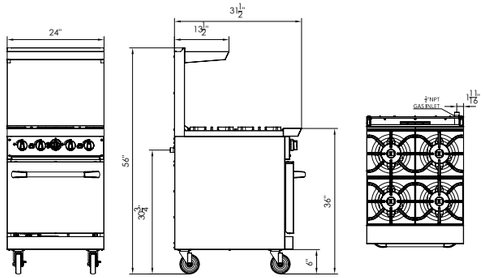



Model		IR24-24G (24" Griddle Top)			
External Dimensions (inches)	W	24			
	D	31 1/2			
	H	56			
Crated Dimensions (inches)	W	26			
	D	36 4/5			
	H	38 1/4			
Net Weight		304.70			
Gross Weight		370.70			
Gas Source		LPG		NAT	
Burner Count		Griddle	Oven	Griddle	Oven
		2	1	2	1
Single Burner		26000	30000	26000	30000
Total Output (BTU)		82000			
Orifice Size		53	52	43	40
Gas Pressure		10 in. WC		5 in. WC	

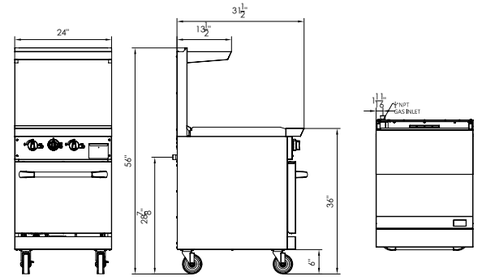

Ranges

Features

- Burner and griddle configurations
- 30,000 BTU/hr anti-clogging lift-off burner heads
- 3/4" thick polished steel griddle plates
- 35,000 BTU/hr oven
- Oven temperatures from 175°F to 500°F
- 2 chrome racks included
- Fits 18" x 26" sheet pans
- Porcelain oven interior for easy cleaning
- Units available in natural gas or liquid propane
- 1 year parts and labour warranty

SANITATION C US








Model		IR36-6B (6 Burner)			
External Dimensions (inches)	W	36			
	D	31 1/2			
	H	56			
Crated Dimensions (inches)	W	38			
	D	36 4/5			
	H	41 7/8			
Net Weight		384.96			
Gross Weight		438.68			
Gas Source		LPG		NAT	
Burner Count		Open Burner	Oven	Open Burner	Oven
		6	1	6	1
Single Burner		30000	35000	33000	35000
Total Output (BTU)		215000		233000	
Orifice Size		52	49	41	38
Gas Pressure		10 in. WC		5 in. WC	


IR36-2B-24G (36" Combination 2 Burner & 24" Griddle Top)					
36					
31 1/2					
56					
38					
36 4/5					
41 7/8					
375.76					
461.56					
LPG			NAT		
Open Burner	Griddle	Oven	Open Burner	Griddle	Oven
2	1	1	2	1	1
30000	28000	35000	33000	28000	35000
123000			129000		
52	53	49	41	43	38
10 in. WC			5 in. WC		

IR36-4B-12G (36" Combination 4 Burner & 12" Griddle Top)					
36					
31 1/2					
56					
38					
36 4/5					
41 7/8					
399.63					
485.43					
LPG			NAT		
Open Burner	Griddle	Oven	Open Burner	Griddle	Oven
4	1	1	4	1	1
30000	28000	35000	33000	28000	35000
183000			195000		
52	53	49	41	43	38
10 in. WC			5 in. WC		


IR36-6B (6 Burner)

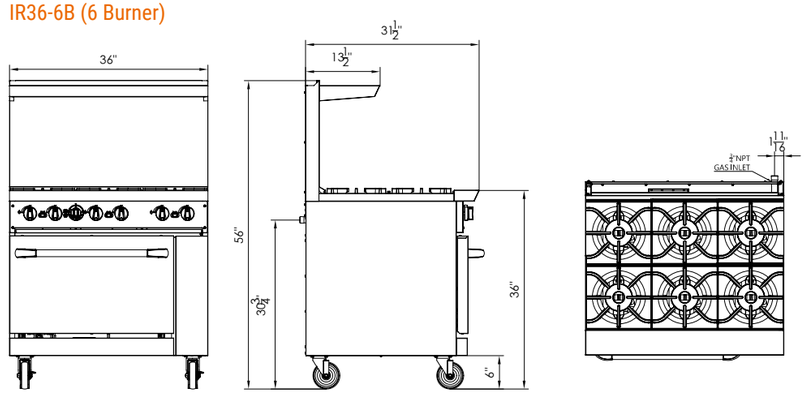

IR36-2B-24G (36" Combination 2 Burner & 24" Griddle Top)

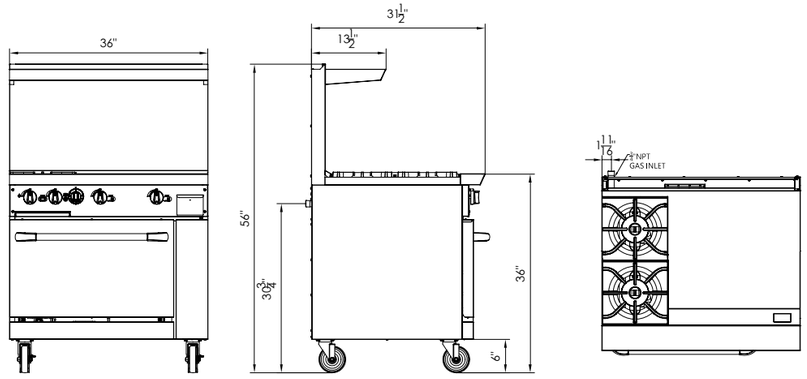

IR36-4B-12G (36" Combination 4 Burner & 12" Griddle Top)

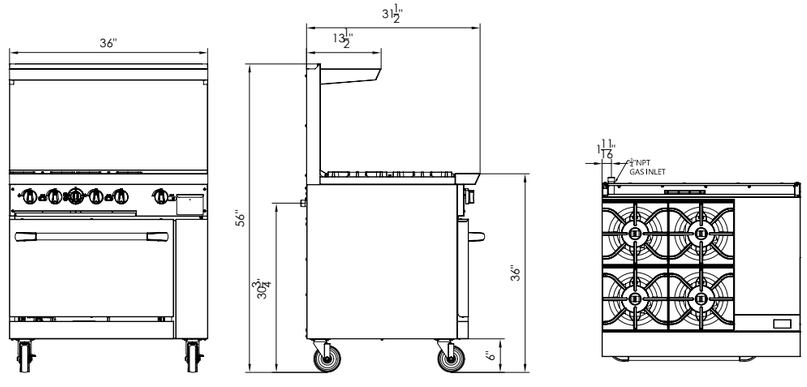

Ranges

Features

- Burner and griddle configurations
- 30,000 BTU/hr anti-clogging lift-off burner heads
- 3/4" thick polished steel griddle plates
- 35,000 BTU/hr oven
- Oven temperatures from 175°F to 500°F
- 2 chrome racks included
- Fits 18" x 26" sheet pans
- Porcelain oven interior for easy cleaning
- Units available in natural gas or liquid propane
- 1 year parts and labour warranty

SANITATION C US









Model		IR60-10B (10 Burner)				IR60-6B-24G (60" Combination 6 Burner & 24" Griddle Top)						IR60-4B-36G (60" Combination 4 Burner & 36" Griddle Top)					
External Dimensions (inches)	W	60				60						60					
	D	31 1/2				31 1/2						31 1/2					
	H	56				56						56					
Crated Dimensions (inches)	W	62				62						62					
	D	36 4/5				36 4/5						36 4/5					
	H	41 7/8				41 7/8						41 7/8					
Net Weight		597.52				626.12						643.28					
Gross Weight		716.10				744.92						762.08					
Gas Source		LPG		NAT		LPG			NAT			LPG			NAT		
Burner Count		Open Burner	Oven	Open Burner	Oven	Open Burner	Griddle	Oven	Open Burner	Griddle	Oven	Open Burner	Griddle	Oven	Open Burner	Griddle	Oven
		10	2	10	2	6	2	2	6	2	2	4	3	2	4	3	2
Single Burner		30000	35000	33000	35000	30000	28000	35000	33000	28000	35000	30000	28000	35000	33000	28000	35000
Total Output (BTU)		370000		400000		306000			324000			274000			286000		
Orifice Size		52	49	41	38	52	53	49	41	43	38	52	53	49	41	43	38
Gas Pressure		10 in. WC		5 in. WC		10 in. WC			5 in. WC			10 in. WC			5 in. WC		


IR60-10B (10 Burner)

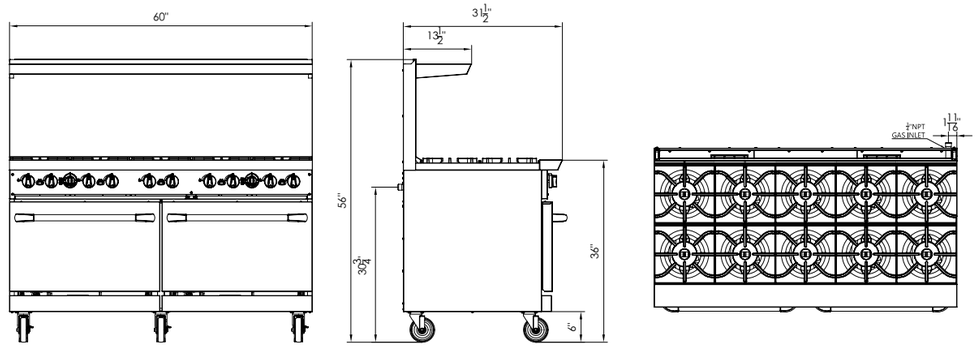

IR60-6B-24G (60" Combination 6 Burner & 24" Griddle Top)

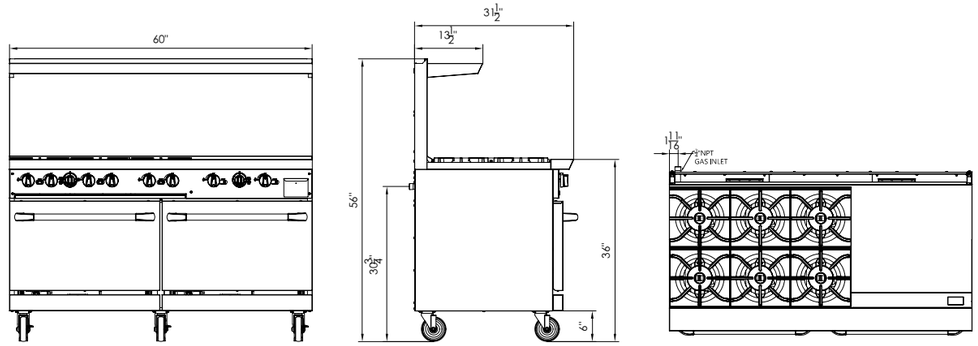

IR60-4B-36G (60" Combination 4 Burner & 36" Griddle Top)

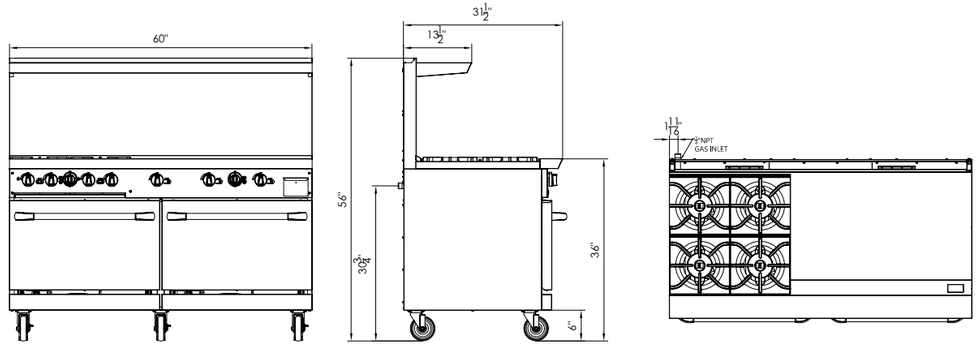

Hot Plates

The Inferno hot plate is constructed with heavy duty stainless steel, cast iron grates and 28,000 BTU liftoff anti-clogging cast iron burners. All hot plates come standard in natural gas and are field convertible to liquid propane with the included conversion kit.



SANITATION C US

Hot Plates

Features

- 28,000 BTU/hr burners
- Anti-clogging lift-off cast iron burners
- Full length removable crumb tray
- Shielded pilot light to protect from spills
- Natural gas standard
- Liquid propane conversion kit included
- 1 year parts and labour warranty

SANITATION C US



Model		IHP-2
External Dimensions (inches)	W	12
	D	28 3/4
	H	13 3/8
Crated Dimensions (inches)	W	14 1/8
	D	32 5/8
	H	17 3/4
Net Weight		66.14
Gross Weight		88.18
Gas Source		Nat/Propane
Burner Count		2
Single Burner		28000 BTU/H
Combined		56000 BTU/H
Gas Pressure		NAT: 4 in. WC Propane: 10 in. WC
Orifice Size		NAT: 40# Propane: 52#



Model		IHP-4
External Dimensions (inches)	W	24
	D	28 3/4
	H	13 3/8
Crated Dimensions (inches)	W	26 1/8
	D	32 5/8
	H	17 3/4
Net Weight		110.23
Gross Weight		143.3
Gas Source		Nat/Propane
Burner Count		4
Single Burner		28000 BTU/H
Combined		112000 BTU/H
Gas Pressure		NAT: 4 in. WC Propane: 10 in. WC
Orifice Size		NAT: 40# Propane: 52#

Hot Plates

Features

- 28,000 BTU/hr burners
- Anti-clogging lift-off cast iron burners
- Full length removable crumb tray
- Shielded pilot light to protect from spills
- Natural gas standard
- Liquid propane conversion kit included
- 1 year parts and labour warranty

SANITATION C US







Model		IHP-6
External Dimensions (inches)	W	36
	D	28 3/4
	H	13 3/8
Crated Dimensions (inches)	W	38 1/4
	D	32 5/8
	H	17 3/4
Net Weight		154.32
Gross Weight		209.44
Gas Source		Nat/Propane
Burner Count		6
Single Burner		28000 BTU/H
Combined		168000 BTU/H
Gas Pressure		NAT: 4 in. WC Propane: 10 in. WC
Orifice Size		NAT: 40# Propane: 52#


Model		IHP-8
External Dimensions (inches)	W	48
	D	28 3/4
	H	13 3/8
Crated Dimensions (inches)	W	50 1/4
	D	32 5/8
	H	17 3/4
Net Weight		198.42
Gross Weight		264.56
Gas Source		Nat/Propane
Burner Count		8
Single Burner		28000 BTU/H
Combined		224000 BTU/H
Gas Pressure		NAT: 4 in. WC Propane: 10 in. WC
Orifice Size		NAT: 40# Propane: 52#


IHP-2

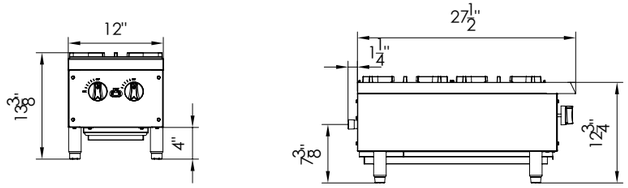




IHP-4

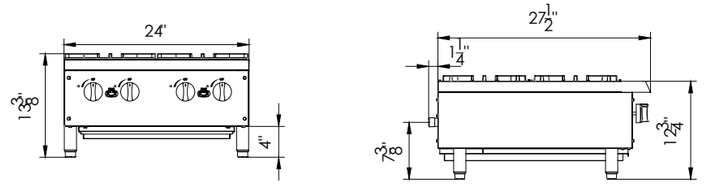





IHP-6

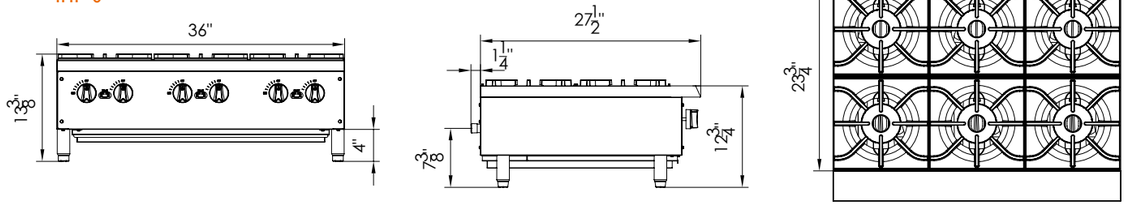

IHP-8

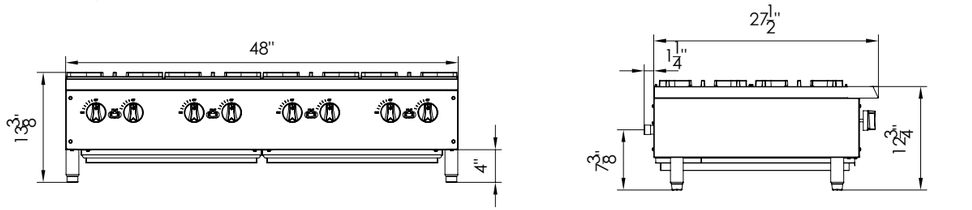

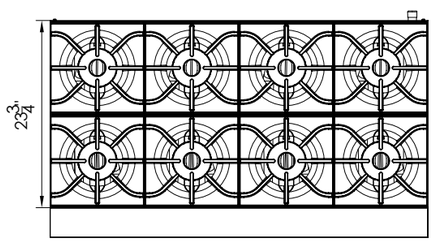

Charbroilers

Inferno broilers feature an innovative design with heavy duty cast iron top grates. Cast "V" shaped radiants deflect heat and minimize excessive flare up. The full size stainless steel drip tray is removable for easy cleaning. Individually controlled 35,000 BTU burners are placed every 12" to provide complete coverage and even heat distribution. All charbroilers come standard in natural gas and are field convertible to liquid propane with the included conversion kit.



SANITATION C US

Charbroilers

Features

- Heavy duty cast iron top grates
- Cast "V" shaped radiants to prevent clogged burners
- Double wall insulated cool-to-the-touch sides
- Full size stainless steel removable drip tray
- Individually controlled 35,000 BTU/hr burners
- Burners located every 12"
- Natural gas standard
- Liquid propane conversion kit included
- 1 year parts and labour warranty

SANITATION C US




Model		IRB-24
External Dimensions (inches)	W	24
	D	28 3/4
	H	15 3/8
Crated Dimensions (inches)	W	26 1/8
	D	32 5/8
	H	20 1/2
Net Weight		132.28
Gross Weight		154.32
Gas Source		Nat/Propane
Burner Count		2
Single Burner		35000 BTU/H
Combined		70000 BTU/H
Gas Pressure		NAT: 4 in. WC Propane: 10 in. WC
Orifice Size		NAT: 34# Propane: 49#



Model		IRB-36
External Dimensions (inches)	W	36
	D	28 3/4
	H	15 3/8
Crated Dimensions (inches)	W	38 1/4
	D	32 5/8
	H	20 1/2
Net Weight		180.78
Gross Weight		211.64
Gas Source		Nat/Propane
Burner Count		3
Single Burner		35000 BTU/H
Combined		105000 BTU/H
Gas Pressure		NAT: 4 in. WC Propane: 10 in. WC
Orifice Size		NAT: 34# Propane: 49#



Model		IRB-48
External Dimensions (inches)	W	48
	D	28 3/4
	H	15 3/8
Crated Dimensions (inches)	W	50 1/4
	D	32 5/8
	H	20 1/2
Net Weight		229.28
Gross Weight		268.96
Gas Source		Nat/Propane
Burner Count		4
Single Burner		35000 BTU/H
Combined		140000 BTU/H
Gas Pressure		NAT: 4 in. WC Propane: 10 in. WC
Orifice Size		NAT: 34# Propane: 49#

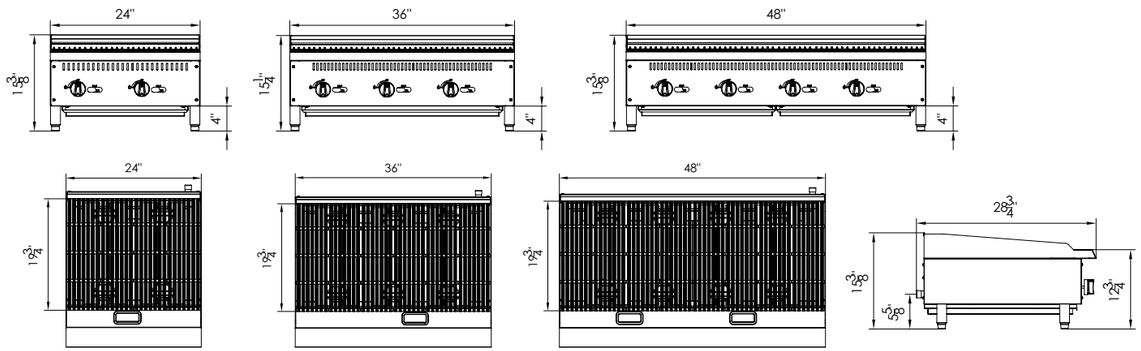

Griddles

The Inferno manual griddle features a sleek and streamlined design, with individually controlled 30,000 BTU burners spaced every 12" to cover a large cooking area. This provides flexibility in using the burners as needed. Additionally, these units come with an easy to clean stainless steel grease trough and grease can. All griddles come standard in natural gas and are field convertible to liquid propane with the included conversion kit.



SANITATION C US

Griddles

Features

- Individually controlled 30,000 BTU/hr burners
- Burners located every 12"
- 3/4" thick polished steel griddle plate
- Double wall insulated cool-to-the-touch sides
- Natural gas standard
- Liquid propane conversion kit included
- 1 year parts and labour warranty

SANITATION C US





Model		IMG-12
External Dimensions (inches)	W	12
	D	30
	H	15 1/4
Crated Dimensions (inches)	W	14 1/8
	D	32 5/8
	H	18 7/8
Net Weight		123.5
Gross Weight		138.9
Work Area (inches)		11.85 x 20.50
Gas Source		Nat/Propane
Burner Count		1
Single Burner		30000 BTU/H
Combined		30000 BTU/H
Gas Pressure		NAT: 4 in. WC Propane: 10 in. WC
Orifice Size		NAT: 37# Propane: 51#

Model		IMG-24
External Dimensions (inches)	W	24
	D	30
	H	15 1/4
Crated Dimensions (inches)	W	26 1/8
	D	32 5/8
	H	18 7/8
Net Weight		176.37
Gross Weight		198.42
Work Area (inches)		23.86 x 20.50
Gas Source		Nat/Propane
Burner Count		2
Single Burner		30000 BTU/H
Combined		60000 BTU/H
Gas Pressure		NAT: 4 in. WC Propane: 10 in. WC
Orifice Size		NAT: 37# Propane: 51#

Griddles

Features

- Individually controlled 30,000 BTU/hr burners
- Burners located every 12"
- 3/4" thick polished steel griddle plate
- Double wall insulated cool-to-the-touch sides
- Natural gas standard
- Liquid propane conversion kit included
- 1 year parts and labour warranty

SANITATION C US








Model		IMG-36
External Dimensions (inches)	W	36
	D	30
	H	15 1/4
Crated Dimensions (inches)	W	38 1/4
	D	32 5/8
	H	18 7/8
Net Weight		244.71
Gross Weight		275.5
Work Area (inches)		35.86 x 20.50
Gas Source		Nat/Propane
Burner Count		3
Single Burner		30000 BTU/H
Combined		90000 BTU/H
Gas Pressure		NAT: 4 in. WC Propane: 10 in. WC
Orifice Size		NAT: 37# Propane: 51#

Model		IMG-48
External Dimensions (inches)	W	48
	D	30
	H	15 1/4
Crated Dimensions (inches)	W	50 1/4
	D	32 5/8
	H	18 7/8
Net Weight		326.28
Gross Weight		365.97
Work Area (inches)		47.86 x 20.50
Gas Source		Nat/Propane
Burner Count		4
Single Burner		30000 BTU/H
Combined		120000 BTU/H
Gas Pressure		NAT: 4 in. WC Propane: 10 in. WC
Orifice Size		NAT: 37# Propane: 51#


IMG-12










IMG-24




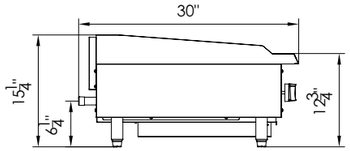





IMG-36

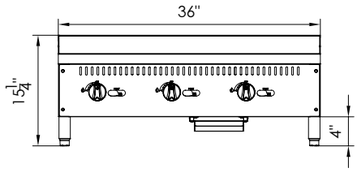







IMG-48

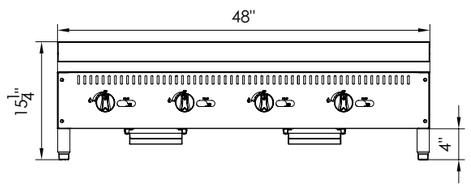

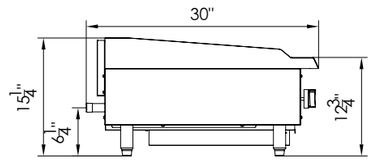

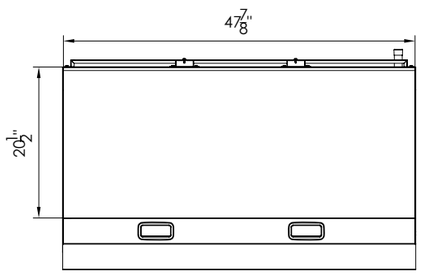

Fryers

The Inferno fryer features cast iron burners that provide even heat distribution across a large area. Its durable temperature probe quickly responds to temperature changes, providing a quick recovery time. Operating temperatures range from 200°F to 400°F with a millivolt safety control system. A large cold zone allows sediment to be easily separated out, maintaining oil quality and life span.



SANITATION C US

Fryers

Features

- Cast iron burners
- Stainless steel tank
- Durable temperature probe
- Quick recovery time
- Operating temperatures from 200°F to 400°F
- Safety valve with automatic voltage stabilizing function
- Large cool zone to extend oil life
- Available in natural gas or liquid propane
- 1 year parts and labour warranty

SANITATION C US




Model		IF-40
External Dimensions (inches)	W	15 1/2
	D	32 7/8
	H	45 1/8
Crated Dimensions (inches)	W	17 7/8
	D	35 3/8
	H	37 5/8
Net Weight		165.35
Gross Weight		187.39
Gas Source	NAT	LPG
Burner Count	3	
Single Burner	30000 BTU/H	
Combined	90000 BTU/H	
Gas Pressure	4 in. WC	10 in. WC
Orifice Size	39#	52#
Oil Tank Capacity	40	



Model		IF-50
External Dimensions (inches)	W	15 1/2
	D	32 7/8
	H	45 1/8
Crated Dimensions (inches)	W	17 7/8
	D	35 3/8
	H	37 5/8
Net Weight		176.35
Gross Weight		198.42
Gas Source	NAT	LPG
Burner Count	4	
Single Burner	30000 BTU/H	
Combined	120000 BTU/H	
Gas Pressure	4 in. WC	10 in. WC
Orifice Size	39#	52#
Oil Tank Capacity	50	



Model		IF-70
External Dimensions (inches)	W	21
	D	32 7/8
	H	45 1/8
Crated Dimensions (inches)	W	23 3/8
	D	35 3/8
	H	37 5/8
Net Weight		220.46
Gross Weight		246.92
Gas Source	NAT	LPG
Burner Count	5	
Single Burner	30000 BTU/H	
Combined	150000 BTU/H	
Gas Pressure	4 in. WC	10 in. WC
Orifice Size	39#	52#
Oil Tank Capacity	70	

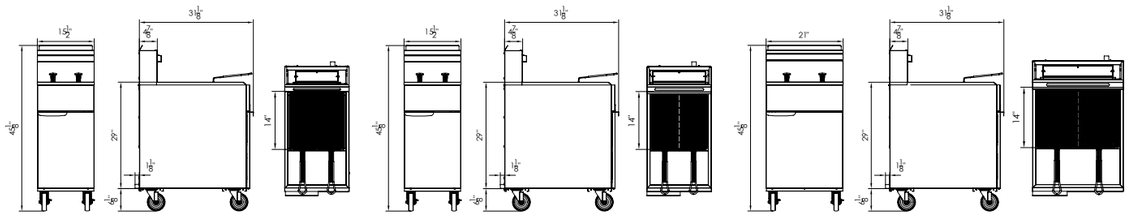

Stock Pot Ranges

The Inferno stock pot range is built with heavy-gauge stainless steel and features a 3-ring burner design with cast iron grates. Units are available in single or double burner and include a removable drip tray.



SANITATION C US

Stock Pot Ranges


Features

- 40,000 BTU/hr burners
- 3-ring burner design
- Seperate controls for inner and outer rings
- Cast iron grates
- Full length removable drip pan
- Units available in single or double burner
- Natural gas standard
- Liquid propane conversion kit included
- 1 year parts and labour warranty

SANITATION C US




Model		ISP-1
External Dimensions (inches)	W	18
	D	24 1/4
	H	22 3/4
Crated Dimensions (inches)	W	21 1/8
	D	27 1/2
	H	22 1/2
Net Weight		115
Gross Weight		157
Gas Source		Nat/Propane
Burner Count		2
Single Burner		40000 BTU/H
Combined		80000 BTU/H
Gas Pressure		NAT: 4 in. WC Propane: 10 in. WC
Orifice Size		NAT: 40# Propane: 52#

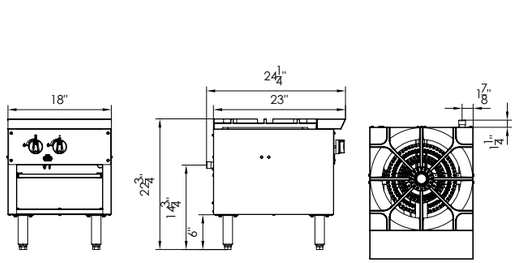



Model		ISP-2
External Dimensions (inches)	W	18
	D	42 1/4
	H	22 3/4
Crated Dimensions (inches)	W	21 1/8
	D	45 1/2
	H	22 1/2
Net Weight		224
Gross Weight		310
Gas Source		Nat/Propane
Burner Count		4
Single Burner		40000 BTU/H
Combined		160000 BTU/H
Gas Pressure		NAT: 4 in. WC Propane: 10 in. WC
Orifice Size		NAT: 40# Propane: 52#

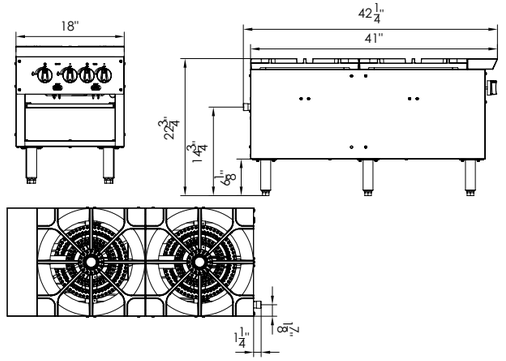

Salamander

The Inferno infrared salamander broiler is constructed with stainless steel and 35,000 BTU/hr infrared burners for rapid finishing. Units can be mounted over Inferno gas ranges or wall-mounted for easy access. Continuous pilot lights offer instant ignition. The rack has 3 locking positions and can be rolled out for easy loading and unloading.



SANITATION C US

Salamander


Features

- Stainless steel insulated construction
- Mounts over Inferno gas range or wall-mounted
- 35,000 BTU/hr infrared burners
- Slide-out multi-position racks
- Continuous pilot light for instant ignition
- Units available in natural gas or liquid propane
- 1 year parts and labour warranty

SANITATION C US



Model		ISB-36
External Dimensions (inches)	W	36
	D	18
	H	17 7/16
Crated Dimensions (inches)	W	40 9/10
	D	24 2/5
	H	23 3/5
Net Weight		116.81
Gross Weight		163.10
Gas Source		LPG/NAT
Burner Count		1
Single Burner		35000 BTU/H
Combined		35000 BTU/H

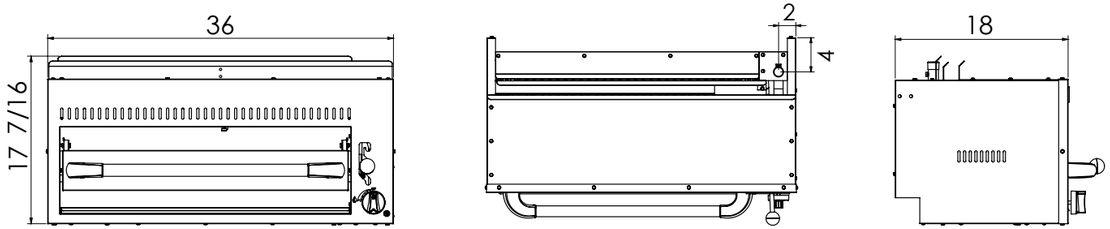

Cheesemelter

The Inferno infrared cheesemelter is constructed with stainless steel and 35,000 BTU/hr infrared burners for rapid finishing. Units can be mounted over Inferno gas ranges or wall-mounted for easy access. This unit has continuous pilot lights for instant ignition and a multi-position slide-out rack.



SANITATION C US

Cheesemelter


Features

- Stainless steel insulated construction
- Mounts over Inferno gas range or wall-mounted
- 35,000 BTU/hr infrared burners
- Slide-out multi-position racks
- Continuous pilot light for instant ignition
- Units available in natural gas or liquid propane
- 1 year parts and labour warranty

SANITATION C US



Model		ICM-36
External Dimensions (inches)	W	36
	D	18
	H	17 7/16
Crated Dimensions (inches)	W	40 9/10
	D	24 2/5
	H	23 3/5
Net Weight		92.57
Gross Weight		138.85
Gas Source		LPG/NAT
Burner Count		1
Single Burner		35000 BTU/H
Combined		35000 BTU/H

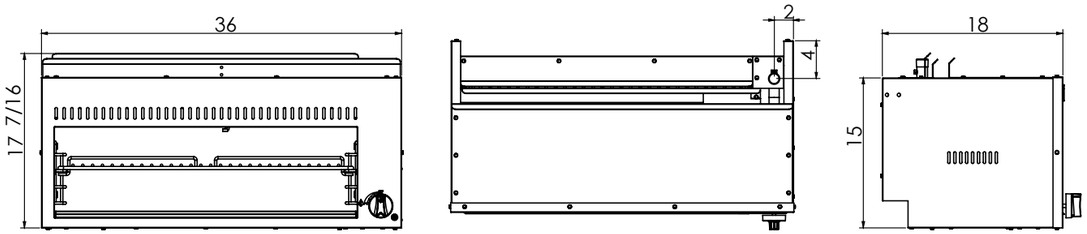

GLACIER | inferno

WWW.GLACIER-INFERNO.COM